


Paddy Placement Hip and Ridge Tile

Install a continuous bead of Polyfoam AH 160 under each lateral side of the TrimLock Plus product approximately 30 grams, whereas the foam expands and locks through the TrimLock Plus preferations and/or refer to roof tile adhesive manufacturer's product approval for performance data and limit of use over hip and ridge metal.

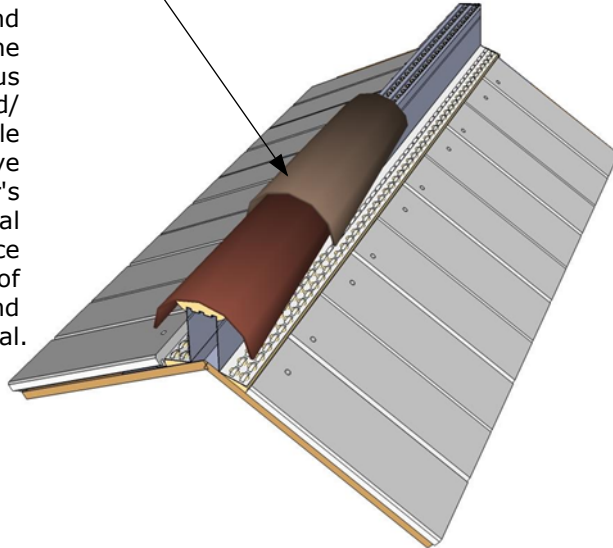

Details and Specifications

Recommended Installation by Polyfoam Products

For more detailed information on limitations and installation please contact Polyfoam Products at 1-888-774-1099

or visit their website at <http://www.polyfoam.cc>

Important:

For more detail please refer to your local county building codes

Choose the right profile height depending on the tile height. For more information please refer to the East Coast Metals Channel Chart

Patent:

US D583,965S / 7774990

Approval:

Florida State Approval FL5374-R2

Section Details:

Foam expanding and locking through the Trim Lock preferations

This installation sheet does not constitute the user own workplace risk assessment, which is required under OSHA (Occupational Safety and Health Administration)


 Please handle with caution

Roof Tile

Foam

Preferations

Section Details



Preferations

Hem

Foam



2301 West 8th Lane - Hialeah, Florida 33010
Tel: 305-885-9991 Fax: 305-885-9008
<http://www.eastcoast-metals.com>

TRIM LOCK PLUS CHANNEL METAL INSTALLATION GUIDE

NOT DRAWN TO SCALE

F601