

## Details and Specifications

### Length:

Approx. 10' feet

### Material:

Aluminum  
Galvalume steel  
Galvanized steel

### Height:

3.0" inches	5.0" inches
3.5" inches	6.0" inches
4.0" inches	

### Installation Tips:

Install a continuous bead of Polyfoam AH 160 under each lateral side of the TrimLock Plus product approximately 30 grams, whereas the foam expands and locks through the TrimLock Plus preferations and/ or refer to roof tile adhesive manufacturer's product approval for performance data and limit of use over hip and ridge metal.

Choose the right profile height depending on the tile height. For more information please refer to the East Coast Metals Channel Chart.

### Patent:

US D583,965 S / 7774990

### State Approval:

Florida State Approval FL5374-R2



### Section Details:

Foam expanding and locking through the Trim Lock Plus preferations.

Hemmed Edges for improved handling and safety, prevent cuts and abrasions and also adds strength and rigidity.

This installation sheet does not constitute the users own workplace risk assessment, which is required under OSHA (Occupational Safety and Health Administration).

Please handle with caution!

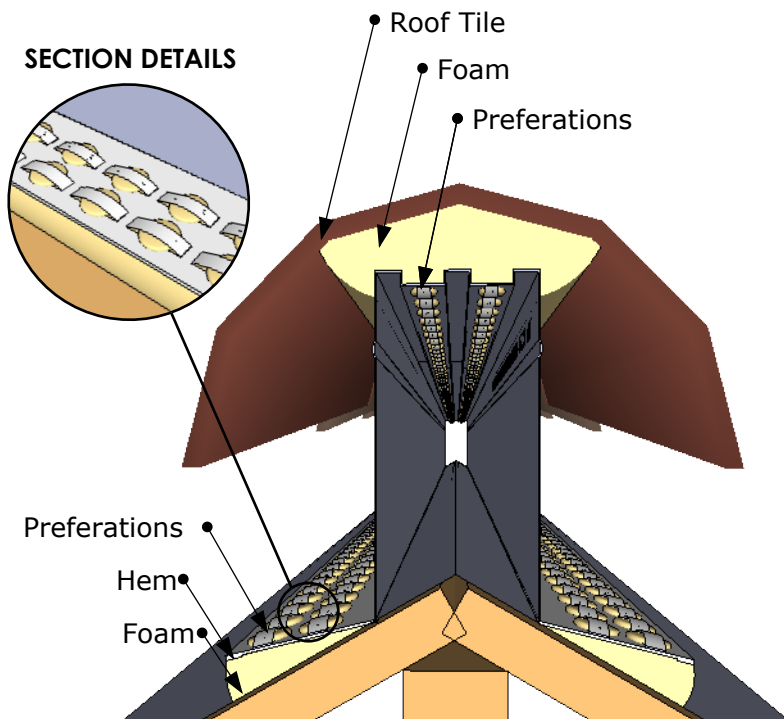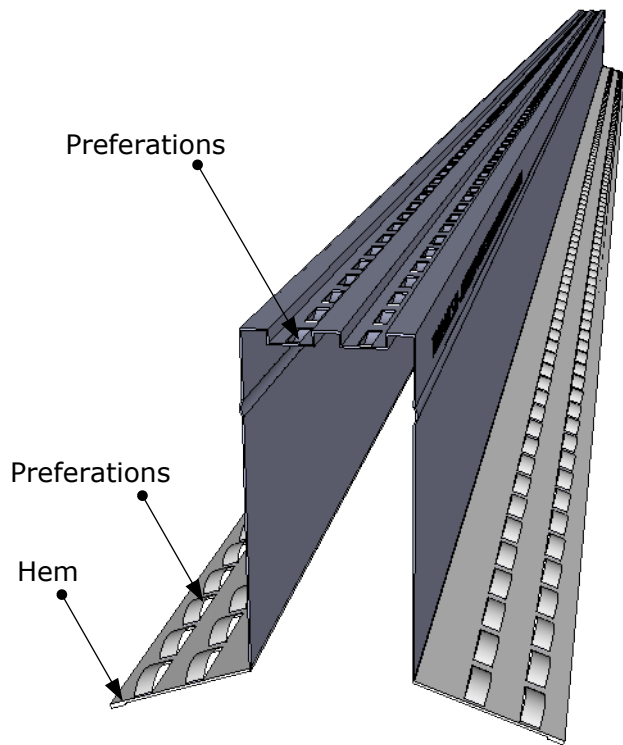

2301 West 8th Lane - Hialeah, Florida 33010  
Tel: 305-885-9991 Fax: 305-885-9008  
<http://www.eastcoast-metals.com>

## TRIM LOCK PLUS CHANNEL METAL Product Information

NOT DRAWN TO SCALE

601